

## BEFORE INSTALLATION

- Thoroughly inspect each of your SeatSaver™ before installation to determine if any or all of the following special features apply to your specific seat style. Some of the information presented in this instruction sheet may not apply to your specific installation. Please be sure to use the application information for your installation.
- **The FRONT DRIVER SIDE cover is identified by the “SeatSaver” logo on the side panel of the seat cover. It is important that this cover be installed on the FRONT DRIVER SIDE only.**

## SPECIAL POINTS TO WATCH FOR & CONSIDER

1. Contour of seat back and cushions, including separate headrest and/or armrest covers. Some sets may have additional headrest covers to accommodate optional-sized headrests.
2. Cutouts for seat adjustment levels and buttons, shoulder harness retaining brackets, and stationary seat belt harnesses.
3. Hook & loop attachments on elastic straps sewn onto the underside of the bottom cushion.
4. Hook & loop attachments along the bottom outside edge near the crevice area between the seat back and the bottom cushion.
5. Cloth-type belt with hook & loop attachments. Large cloth loop.
6. Side release buckles with webbing straps.
7. Be sure that no hook & loop attachments are connected to other pieces prior to starting the installation.
8. If your vehicle is equipped with brackets on the outboard side of the backrest, check the covers to determine if an opening has been provided for them. If not, they must be removed before installation of the SeatSaver™. If your covers have a belt loop sewn at the bottom, make sure it slips over the backrest while installing the SeatSaver™.




### TIPS

Movement/Adjustment of the seats may assist in cover installation.


## INSTALLING THE HEADREST

### Step 1

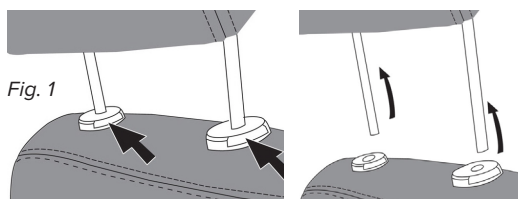

Remove headrests, if applicable (see Fig. 1).


Fig. 2




If headrests are not removable, locate the hook & loop opening in the seatcover and pass the headrest through (see Fig. 2).

## INSTALLING THE BACKREST


**Step 2** Place backrest on first (see Fig. 3), noting any seat details or features that have a corresponding opening or cutout on the cover (seatbelt, armrest, removable headrests, etc.). **NOTE:** Fold flat seats commonly have a separate top and bottom piece.




Front view of backrest



Back view of backrest




Backrest slips around armrest



Corresponding openings for removal headrests

**INSTALLING THE SEAT CUSHION**

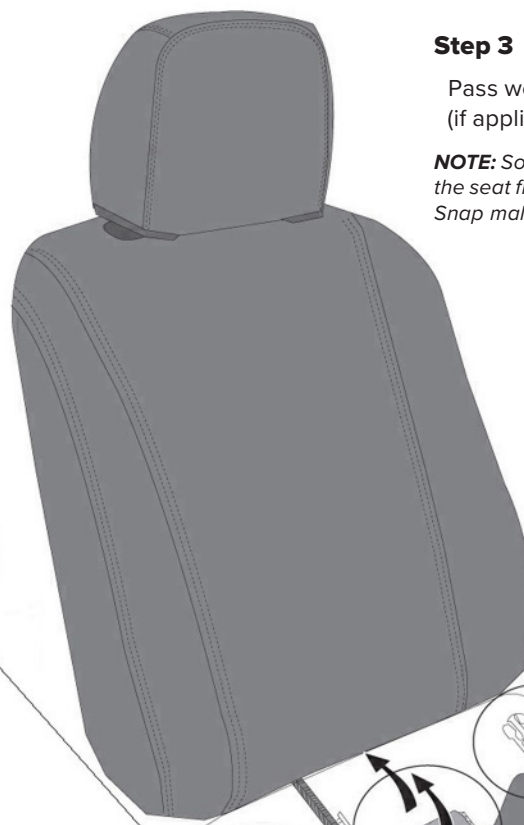

**Step 3**

Pass webbing attachment and male end of buckle (if applicable) through the seat crevice (see Fig. 4).

*NOTE: Some webbing attachments may pass to the front of the seat from the crevice, while others may pass to the rear. Snap male portion of buckle into female portion as shown below (see Fig. 4).*



Fig. 4





Fig. 8



**Step 7**

Secure the hook and loop fasteners in their proper locations (if applicable) or secure the hook fastener to the carpeted portion of the seat back/bottom (see Fig. 8).



Fig. 7



Fig. 6

**Step 5**

Foam pillow insets go between plastic seat trim and seat cushion (if applicable) and/or between seat cushion and backrest (if applicable). (see Fig. 6).



Fig. 5

**Step 4**

J-Clip fasteners attach to seat trim and/or seat frame (if applicable). (see Fig. 5).

**Step 6**

Pass webbing attachment through buckle (if applicable) and tighten straps. (see Fig. 7).


**Step 8**

If your vehicle has a center seat console, with or without headrests, please refer to the above information and install the corresponding center console covers on your seats.

**INSTALLING THE ARMREST**


**Step 9**

Determine the correct cover for each armrest by matching the contour/shape of the cover with the contour/shape of the armrest. Pull the cover completely over the armrest, securing it over the rear edge (see Fig. 9). Adjust as needed.



**Step 10**

If the seats are equipped with options such as additional levers or controls, an optional patch must be removed for access. From the inside of the cover only, cut the stitches holding the patch in place. Remove the patch and any loose threads that may remain (see Fig. 10).

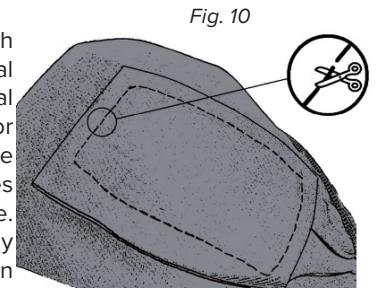

**INSTALLING THE REAR SEATS**


**Step 11**

Remove the headrests (if applicable), (see Fig. 1 in Step 1 on pg. 1). If headrests are not removeable, locate the hook and loop openings in the seat cover that will allow for the headrests to pass through (see Fig. 2 in Step 1 on pg. 1).



Place cover(s) over their respective part(s) (60/40) noting any seat details or features that have a corresponding opening or cutout on the cover (seatbelt, armrest, headrest, etc.) (see Fig. 11).

**NOTES:**

- In certain applications, the backrest cover will pass under the center seatbelt.
- In certain applications, the backrest cover will have a hook and loop closure in front or in the back to accommodate the center seatbelt.
- In certain applications, the backrest cover will have a hook and loop closure in back to accommodate the center seatbelt.

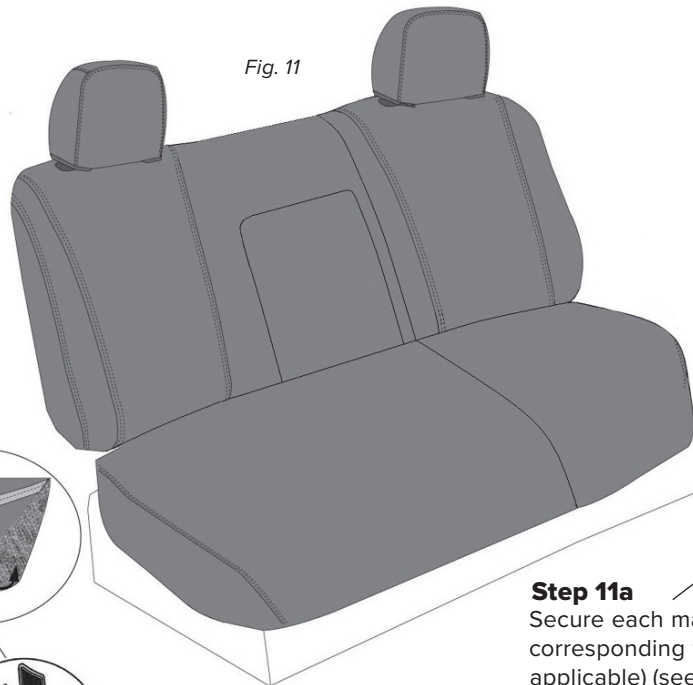

**TIPS**  
Movement/Adjustment of the seats may assist in cover installation.



**Step 11b**

Secure hook and loop fasteners in their proper locations (if applicable) or secure the hook fastener to the carpeted portion of the seat back/bottom (see Fig. 14).

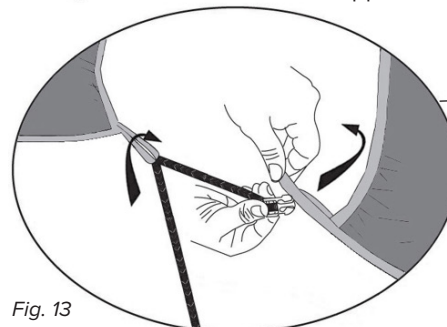


Fig. 13

In certain applications, the webbing(s) on the bottom seat portion will pass through a loop on the cover, creating an additional anchor point before securing to its corresponding buckle (see Fig. 13).




Fig. 12

**Step 11a**


Secure each male end of the buckle to corresponding female end of buckle (if applicable) (see Fig. 12). Tighten straps.

**INSTALLING THE REAR SEAT ARMREST/CONSOLE**


Determine the correct orientation for the cover by matching the contour/shape of the cover with the contour/shape of the armrest/console.

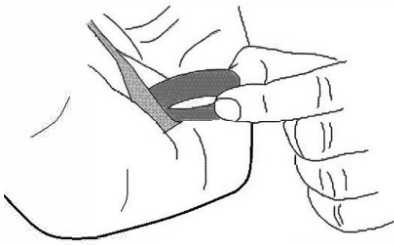*Fig. 15***Step 12**

Pull the cover over the armrest/console, making sure to pull the release strap through the cutout (if applicable). (see Fig. 15).

*Fig. 16***Step 13**

With the armrest/console tilted, insert the rear attachment through the space between the seat back and rear edge of the armrest/console (see Fig. 16).

*Fig. 17***Step 14**

With the armrest/console folded down, secure the hook and loop fastener at the rear edge (see Fig. 17). Adjust as needed.

**CARE AND CLEANING INSTRUCTIONS**

- Wash your SeatSaver™ in a conventional washing machine, using cold water, a low-sudsing detergent and a gentle cycle setting.
- **DO NOT use bleach or fabric softener.**
- Dry covers using the AIR or LOW HEAT setting on a standard tumble dryer. They may also be line dried, weather conditions and temperature permitting.
- **DO NOT IRON.**

**LIMITED WARRANTY**

- Covers are warranted from date of purchase to the original purchaser.
- Save your receipt!
- Warranty coverage protects against defects in material and workmanship, as well as the fabric becoming unserviceable during normal use. After factory inspection, we will repair or replace the cover judged to be unusable.



If you encounter any problems during the installation of your SeatSaver™, please contact our Customer Service Department, Monday-Friday, 9AM-7PM(EST) at **800-274-7006** or by e-mail at **sales@covercraft.com**. You may also access help videos on the web at **covercraft.com**